



PreTone

Various Colors

COLORATION



Water-based pigment stain for wooden floors. Color intensification under oxidizing oils.

- Allows an infinite amount of customization
- Intensifies light colors
- Reduces oil-specific amberizing
- Easy and safe application
- Solvent-free and odor-neutral
- Unlimited color combinations

Recommended use:

On sanded wood floors prior to the application of LOBA 2K ImpactOil. LOBA PreTone colors can be mixed at any ratio to achieve custom colors.

Product data

ART.-NO.			
10612	2.5l	6	216

Contents

water, nonionic surfactants, dyes, pigments, preservatives

Storage and transportation

Shelf life: 36 months in unopened containers.

Store and transport between 40°F to 75°F (5°C to 25°C). KEEP FROM FREEZING.

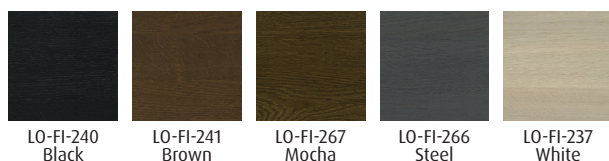


Illustration colors are non-binding

Product data

RANGE OF USE FOR WOOD TYPES:

NORTH AMERICAN/EUROPEAN SPECIES			
Maple (Canadian)	+	Arrurra Vermelho	+
Maple (European)	+	Bamboo	+
Acacia / Yellow Locust	+	basralocus wood	+
Acacia / Yellow Locust steamed	+	Opepe	+
Birch	+	Cabreuva	+
Pear tree	+	Coigue steamed	+
Beech steamed	+	Cumaru / Almendrillo	+
Beech natural	+	Curupau	+
White Oak	+	Curupay	+
Alder	+	Doussie / Afzelia	+
Ash	+	Ebony / Makassar	+
Spruce	+	Eucalyptus / Jarrah	+
Chestnut tree	+	Eucalyptus / Spottet Gum	+
Pine	+	Guatambu	+
Cherry (North American)	+	Hard Pine (new floors)	+
Cherry (European)	+	Rubberwood	+
Larch	+	Incienco Colorado	+
Walnut (European)	+	Ipe / Lapacho / Guaycan	+
Olive tree	+	Iroko / Kambala	+
Smoked oak	+	Iron Wood	+
Red Oak	+	Jatoba / Brazilian Cherry	+
Elm	+	Kempas	+
Further Species		Coconut	+
Afromosia / Kokrodua	+	Kotibe / Mahogany	+
		Mahogany	+
		Mahogany Acajou	+
		Massaranduba	+
		Mecrusse	+
		Moluccan Ironwood	+
		Muhuhu	+
		Mutenye	+
		Camwood	+
		rosewood	+
		Partridge Wood	+
		Pigua Marfin	+
		Pitch Pine (old floors)	+
		Purpleheart	+
		Sucupira	+
		Tasmanien Oak	+
		Tauari	+
		Teak	+
		Tigerwood	+
		Wenge	+
		Yvyro	+
		Cypress	+
		Other Surfaces	
		Multiplex	+
		OSB Board	+
		Chipboard	+

+ No restriction on use.

◇ Use can cause problems. Consultation with LOBA recommended.

– Use not recommended.

Information for Use

- For professional use only!
- BEFORE USING, READ AND UNDERSTAND ALL LABEL INSTRUCTIONS AND MATERIAL SAFETY DATA SHEETS.
- For technical advice call our Loba-Wakol Technical Service at 1-800.230.6456.
- Recommended conditions are 55°F-80°F/40-75%rH.
- Sand and prepare floors according to NWFA guidelines.
- **WARNING!** If you scrape, sand, or remove old paint from wood floors, you may release lead dust. Follow local and/or federal requirements for lead removal. Before you start, find out how to protect yourself and others by contacting the National Lead Information Hotline at 1-800-424-LEAD or log on to www.epa.gov/lead.
- ALWAYS PREPARE A SAMPLE OR TEST AREA TO DETERMINE COMPATIBILITY, APPEARANCE, AND DESIRED RESULTS.
- Shake material well before use.
- Do not thin. Do not add water.
- Do not apply at temperatures below 55°F (13°C). Make sure material is at room temperature. Always maintain adequate

ventilation during all phases of the coating and drying process.

- Apply evenly at the recommended coverage rate. Avoid streaks, puddles, and lap marks.

APPLICATION TOOL

Trim pad Item 6041
 Padco Appliacator Item 6000
 Pump sprayer with flat pattern nozzle
 LOBA Wischwiesel
 Single disc machine
 LOBASAND SpecialPad green

COVERAGE

Approx. 275-325 sqft per unit.
 Coverage depends on the absorbency of the wood.
 Determine the exact coverage by creating a sample area.

DRYING TIME

- Drying over night.

Information for Use

WIPE-APPLICATION

- Apply PreTone liberally with a LOBA Wischwiesel, a trim pad and/or, lambswool applicator lengthwise along the grain. Ensure product is evenly applied before moving to the next section of flooring.*
- Drying overnight.
- Remove grain raise using a buffing machine and a LOBASAND SpecialPad green. Vacuum all sanding dust.

SPRAY-APPLICATION

- Spray application saves considerable time, especially on large areas, and offers an ergonomic way of working. Spray application should be done by 2 people because the material must be evened out immediately after spraying. Two or more sprayers should be used for areas larger than 1000 square feet. Garden sprayers operated at constant pressure in conjunction with a special flat pattern nozzle with a 90° spray angle, are ideal.
- Prior to the application, mask directly adjacent areas (e.g. doors, skirtings etc.) with masking tape.
 - Guide the spray nozzle at a constant distance and angle to the surface and apply approximately 110 - 130 square feet per liter PreTone evenly in successive width. Even out the coverage with a LOBA Wischwiesel immediately after a width has been applied.*
 - Dry overnight.
 - Break raised grains by using a buffing machine and a LOBASAND SpecialPad green and remove the sanding dust.

* Tip: When applying a second coat after two 2 minutes impact time, the colors are more intensive and homogeneous.

IMPREGNATION

- Impregnate surface with the 2K ImpactOil Color of your choice. Refer to the Technical Data Sheet of the product.
- Impregnating with Transparent oils is discouraged as it can highlight imperfections in the Pre-Tone application. Refer to the Technical Data Sheet of the product.

COMPATIBILITY

When this product is used in combination with other LOBA products the technical information of these products must be followed. Refer to the Technical Data Sheets. LOBA cannot guarantee the suitability of products other than LOBA.

General guidelines

Cleaning of tools: Clean tools and equipment with water.

Cure Time: The stated drying and cure times are based on ideal conditions (68°F, 50% rH) at the recommended application rates. Insufficient ventilation, high humidity, lower temperatures, increased coat thickness can prolong the curing process considerably. Do not cover floors, replace carpets or rugs, or clean floors with a damp mop/cloth before the final curing has been reached.

Safety Precautions: Even when working with low or zero-emission products the usual safety measures must be taken. Keep away from children. Do not eat, drink, or smoke in working areas. Wear suitable safety gloves. Clean product off of hands. Change soiled clothes.

First Aid: If swallowed, do not induce vomiting. Call for medical help immediately. Never give anything by mouth to an unconscious person. If breathing is difficult or other respiratory complaints, remove to fresh air and get medical attention. In case of eye contact, immediately flush eyes for several minutes under running water. Generally, this product does not cause skin irritation. Call a physician if irritation occurs.

Special Information The information in this document and any other information or advice we provide is intended for our customers only, and all information and advice is subject to the terms and limitations in Loba-Wakol's General Terms and Conditions, including without limit its limited warranty ("Terms"). The Terms are not expanded, changed, or waived by the information in this document or by any information or advice given by Loba-Wakol. Loba-Wakol has no relationship or obligation to anyone other than the customer that originally purchases the product from Loba-Wakol.

The information in this document and any other information or advice we provide is the result of our prior experience and our knowledge of our products. Due to the wide variety of application possibilities and processing conditions, it is the customer's responsibility to test our product for suitability for its intended purpose. When in doubt, call our Technical Service for support. Technical Information is also available by visiting our website www.loba-wakol.com. You must read and understand, and have your professional installer read and understand, all information contained in our Terms and in our published specifications, technical data sheets, written directions for installation, use and maintenance, and labels on the product. If you have any questions during application or use, immediately stop the application and use and contact our Technical Service. For information about

General guidelines

other products offered by Loba-Wakol, please check the technical information concerning those products.

The words or symbols denoted by ® stand for trademark rights that are at least registered and protected in the territory of Germany.